

FRISHAUF, HOLTZ, GOODMAN, LANGER & CHICK, P.C.
ATTORNEYS AT LAW

767 THIRD AVENUE, NEW YORK, N.Y. 10017-2023

Express Mail Mailing Label
No.: EL 369 279 486 US

Date of Deposit: November 10, 1999

I hereby certify that this paper is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231

Barbara Villani

Attorney Docket No. 990699/LH

Pursuant to 37 CFR 1.53(b), transmitted herewith for filing is the patent application of

Inventor(s): Kenro OHSAWA

Title: "COLOR REPRODUCTION SYSTEM"

Priority Claim (35 U.S.C. 119) is made, based upon:

Japan No. 10-323137 November 13, 1998

Enclosed herewith are:

- [X] Specification (Description, Claims, Abstract): Pages 1 - 49; Number of claims 1 - 12
- [X] Declaration and Power of Attorney [X] executed; [] unexecuted (supplied for information purposes)
- [X] 7 Sheets of drawings, Figures 1 - 10 [X] Formal [] Informal
- [X] Assignment and "Patents" Recordation Form Cover Sheet (PTO-1595) AND \$40. RECORDATION FEE.
- [X] Certified copy (ies) of priority document(s) identified above
- [] Information Disclosure Statement; [] Form PTO-1449
- [] Preliminary Amendment
- [] Verified Statement(s) Claiming Small Entity Status
- [X] Receipt Postcard

	Number Filed		Number Extra	Rate		Calculations
Total Claims	<u>12</u>	-20 =	<u>0</u>	x \$18.00 =		\$
Independent Claims	<u>3</u>	- 3 =	<u>0</u>	x \$78.00 =		\$
MULTIPLE DEPENDENT CLAIMS				+ \$260.00 =		\$
				BASIC FEE		\$ 760.00
				Total of above Calculations		\$ <u>760.00</u>

To the extent not tendered by check, authorization is given to charge any fees under 37 CFR 1.16 and 1.17 during pendency of the application, or to credit any overpayment, to Deposit Account No. 06-1378. Duplicate copy of this letter is enclosed.

FRISHAUF, HOLTZ, GOODMAN, LANGER & CHICK, P.C.

By:

LEONARD HOLTZ
Reg. No. 22,974

LH:bv

11/98

TITLE OF THE INVENTION

COLOR REPRODUCTION SYSTEM

BACKGROUND OF THE INVENTION

5 The present invention relates to a color reproduction system capable of reproducing a color of an object in consideration of observation illumination light when the image recorded on a recording medium is to be reproduced.

10 Recently, a color management system (CMS) such as a color reproduction system has been widely used, in which the image data obtained by photographing a desired object using a color image input device such as a digital camera is corrected, and a color of the object is faithfully reproduced by a display device
15 such as a CRT monitor or an output device such as a color printer.

In such a system, if illumination light on the photographing side on which an object is photographed differs from illumination light on the observation side
20 on which a reproduced image is observed, the color based on the tristimulus values X, Y, and Z of the object on the photographing side and observed under the illumination light on the observation side looks different from that under the illumination light on the
25 photographing side owing to changes in the perception characteristics of a person, e.g., color adaptation. That is, a problem is posed in terms of "appearance".

The tristimulus values X, Y, and Z are the quantitative values of a color which are determined by the International Commission on Illumination (CIE), and guarantee the "appearance" of the same color under the same illumination light. However, such values cannot properly cope with the "appearance" of a color under different kinds of illumination light as described above.

In order to solve this problem, a conventional CMS aims at reproducing corresponding colors as tristimulus values that provide the "appearance" of the same color on both the observation side and the photographing side by using a human color perception model such as a color adaptation model.

Several models as human color perception models including color adaptation models are disclosed in Mark. D. Fairchild, Color Appearance Models, Addison Wesley, (1998). Studies has been made to construct models that allow more accurate color prediction.

The conventional CMS reproduces the "appearance" of a color of an object on the photographing side. In contrast to this, the color reproduction system disclosed in Jpn. Pat. Appln. KOKAI Publication No. 9-172649 estimates a spectral reflectance image of an object from a photographing image, and applying an observation illumination light spectrum to the spectral reflectance image to obtain tristimulus values

under the observation illumination light and reproduce the color, thereby reproducing the "appearance" of the color on the observation side.

5 In a method of performing such illumination conversion, since tristimulus values of a color of an object under actual observation illumination light are reproduced, the "appearance" of the color can be accurately reproduced without any consideration given to the human perception characteristics such as color
10 adaptation.

Unlike in the conventional CMS, in the above color reproduction method of performing illumination conversion, there is no need to establish a linear conversion relationship between the spectral
15 sensitivity of a camera and CIE XYZ color matching functions, and a color adaptation model under study need not be used. This method, however, requires various data, e.g., illumination light spectrum data on the photographing side and observation
20 side, the spectral sensitivity data of a camera, and statistical characteristics of the spectral reflectance of an object.

In order to measure illumination light spectrum data of such data, an expensive spectrophotometer is
25 generally required, and measurements under the actual photographing environment and observation environment are required. This makes it difficult to construct

a simple system.

In addition, the spectrum characteristics of observation illumination light are not always suited to reproduce a color of an object, a problem arises when delicate differences between colors are to be evaluated.

When there are a plurality of portions to be observed, these portions are rarely positioned under the same illumination light. In general, the respective observers use different kinds of illumination light, and observe the color under the different kinds of illumination light. An inconvenience is caused in many cases, e.g., when an observer is to make a decision for diagnosis in a remote medical practice on the basis of colors while observing a color image of a patient and when absolute evaluation is required without any dependence on communication and observation environments.

BRIEF SUMMARY OF THE INVENTION

It is an object of the present invention to provide a color reproduction system which can replace measurement of an observation illumination light spectrum with simpler measurement of tristimulus values, and performs illumination conversion that allows color reproduction of an object under an illumination light spectrum suited to color reproduction.

According to the present invention, there is provided a color reproduction system comprising

color image input means, color estimation means for
calculating tristimulus values by correcting a color
image signal obtained from the color image input means,
and color image output means for outputting a color
5 based on the tristimulus values obtained by the color
estimation means, the color estimation means including
illumination light measuring means for measuring
tristimulus values of observation illumination light,
virtual illumination light spectrum calculation means
10 for calculating a virtual illumination light spectrum
that provides tristimulus values equal to the
tristimulus values of the observation illumination
light which are obtained by the illumination light
measuring means, and tristimulus value calculation
15 means for calculating tristimulus values of the object
under the virtual illumination light spectrum from the
color image signal.

The virtual illumination light spectrum
calculation means calculates a spectrum from a linear
20 sum of predetermined illumination light spectrum basic
functions. The virtual illumination light spectrum
calculation means calculates a spectrum corresponding
to linear conversion between a product of a spectral
sensitivity of the color image input means and
25 a photographing illumination light spectrum and
a product of a color matching function and the virtual
illumination light spectrum.

In addition, there is provided a color reproduction system comprising color image input means, color estimation means for calculating tristimulus values by correcting a color image signal obtained by the color image input means, and color image output means for outputting a color based on the tristimulus values obtained by the color estimation means, the color estimation means including illumination light measuring means for measuring tristimulus values of observation illumination light, tristimulus value calculating means for calculating tristimulus values of the object under a predetermined standard illumination light spectrum from the color image signal, and corresponding color calculation means for calculating tristimulus values that provide "appearance" of the color of the object which is based on the tristimulus values under the standard illumination light spectrum.

The color reproduction system having the above arrangement accurately reproduces the "appearance" of a color without being influenced by changes in the color perception characteristics of a person such as color adaptation by reproducing the tristimulus values of an object under a virtual illumination light spectrum which provide tristimulus values equal to those of observation illumination light without measuring any observation illumination light spectrum.

In addition, color reproduction can be performed

under illumination light superior in color rendering characteristics to an actual observation illumination light spectrum by calculating a spectrum from the linear sum of basic functions. If such basic functions are standardized, a spectrum is uniquely determined by the tristimulus values of observation illumination light. This facilitates standardization of the characteristics of observation illumination light on the spectrum level. Furthermore, if a virtual illumination light spectrum is obtained such that a linear conversion relationship is established between the product of the spectral sensitivity of the color image input means and a photographing illumination light spectrum and the product of a color matching function and the virtual illumination light spectrum, the accurate tristimulus values of an arbitrary object can be obtained under virtual illumination light.

Each color of an object can always be observed under a predetermined standard illumination light spectrum without any dependence on photographing illumination light and observation illumination light by calculating the tristimulus values of the object under the predetermined standard illumination light spectrum and reproducing tristimulus values that provide the "appearance" of the color, based on the tristimulus values of the object under the standard illumination light spectrum, under the observation

illumination light.

Additional objects and advantages of the invention will be set forth in the description which follows, and in part will be obvious from the description, or may be learned by practice of the invention. The objects and advantages of the invention may be realized and obtained by means of the instrumentalities and combinations particularly pointed out hereinafter.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate presently preferred embodiments of the invention, and together with the general description given above and the detailed description of the preferred embodiments given below, serve to explain the principles of the invention.

FIG. 1 is a block diagram showing an example of the arrangement of an image processing apparatus according to the first embodiment;

FIG. 2 is a graph showing three basic functions for daylight spectra having wavelengths of 380 nm to 780 nm;

FIG. 3 is a block diagram showing the detailed arrangement of a color correction device in FIG. 1;

FIG. 4 is a block diagram showing the arrangement of a color correction device in an image processing apparatus according to the second embodiment;

FIG. 5 is a block diagram showing the arrangement of a color correction device in an image processing apparatus according to the third embodiment;

FIG. 6 is a view showing an example of how an image processing apparatus according to the fourth embodiment is used;

FIG. 7 is a view showing an example of the arrangement of a film turret of a multispectral camera (MSC) used in the fourth embodiment;

FIG. 8 is a view showing an example of the arrangement of the multispectral camera (MSC) used in the fourth embodiment;

FIG. 9 is a view showing an example of how an image processing apparatus according to the fifth embodiment is used; and

FIG. 10 is a block diagram showing the arrangement of an illumination light tristimulus value calculating/processing section in the fifth embodiment.

DETAILED DESCRIPTION OF THE INVENTION

Embodiments of the present invention will be described in detail below with reference to the views of the accompanying drawing.

An outline of a color reproduction system according to the present invention will be described first.

In general, to reproduce a color of an object under observation illumination light from a spectral

reflectance $f(\lambda)$ of the object, tristimulus values X_O , Y_O , and Z_O must be reproduced, which are calculated from observation illumination light spectrum $E_O(\lambda)$ and CIE color matching functions $x(\lambda)$, $y(\lambda)$, and $z(\lambda)$ according to the following equations:

$$\begin{aligned} X_O &= \int_{380}^{780} x(\lambda)E_O(\lambda)f(\lambda)d\lambda \\ Y_O &= \int_{380}^{780} y(\lambda)E_O(\lambda)f(\lambda)d\lambda \\ Z_O &= \int_{380}^{780} z(\lambda)E_O(\lambda)f(\lambda)d\lambda \end{aligned} \quad \dots(1)$$

In this case, since tristimulus values X , Y , and Z in a case wherein the object is located under observation illumination light are reproduced, color reproduction can be accurately performed without any consideration of the visual characteristics of a person which change in accordance with the characteristics of observation illumination light.

In contrast to this, the color based on the tristimulus value X , Y , and Z calculated under illumination light different from the actual observation illumination light is generally perceived as a color with an "appearance" different from the actual "appearance" under the observation illumination light because the visual characteristics, e.g., chromatic adaptation, of a person changes.

With regard to the color perception of a person, the colors based on the same tristimulus values X, Y, and Z are perceived as the same color even if the colors have different spectra. For this reason, under
5 illumination light with the same tristimulus values, the visual characteristics remain unchanged even with different spectra.

That is, even if the tristimulus values X, Y, and Z of an object under virtual illumination light
10 having the same tristimulus values X, Y, and Z as those of actual observation illumination light and a spectrum different from that thereof are reproduced, the "appearance" of the color under the illumination light can be accurately reproduced.

15 On the basis of such an idea, the tristimulus values X, Y, and Z of observation illumination light are measured, and a virtual illumination light spectrum that provides the same tristimulus values X, Y, and Z are calculated to reproduce the tristimulus values X, Y,
20 and Z of the object under the virtual illumination light. This makes it possible to perform accurate color reproduction without measuring the spectrum of the observation illumination light.

A virtual illumination light spectrum that
25 provides the same tristimulus values X, Y, and Z as those of observation illumination light can be calculated with a certain degree of freedom, but can

be uniquely determined by using three predetermined independent basic functions.

If the predetermined basic functions are represented by $\rho_i(\lambda)$ ($i = 1, 2, 3$), and the measured tristimulus values of observation illumination light are represented by X_{wo} , Y_{wo} , and Z_{wo} , a virtual illumination light spectrum $E_h(\lambda)$ can be given by

$$E_h(\lambda) = \sum_{i=1}^3 c_i \rho_i(\lambda) \quad \dots(2)$$

$$\begin{pmatrix} c_1 \\ c_2 \\ c_3 \end{pmatrix} = \begin{pmatrix} \int_{380}^{780} x(\lambda) \rho_1(\lambda) d\lambda & \int_{380}^{780} x(\lambda) \rho_2(\lambda) d\lambda & \int_{380}^{780} x(\lambda) \rho_3(\lambda) d\lambda \\ \int_{380}^{780} y(\lambda) \rho_1(\lambda) d\lambda & \int_{380}^{780} y(\lambda) \rho_2(\lambda) d\lambda & \int_{380}^{780} y(\lambda) \rho_3(\lambda) d\lambda \\ \int_{380}^{780} z(\lambda) \rho_1(\lambda) d\lambda & \int_{380}^{780} z(\lambda) \rho_2(\lambda) d\lambda & \int_{380}^{780} z(\lambda) \rho_3(\lambda) d\lambda \end{pmatrix}^{-1} \begin{pmatrix} X_{wo} \\ Y_{wo} \\ Z_{wo} \end{pmatrix} \quad \dots(3)$$

As the basic functions, for example, the daylight basic functions disclosed in Publication CIE No. 15.2 (1986) can be used. A daylight spectrum is given as the linear sum of three basic functions, can be defined by determining weighting coefficients for the respective basic functions.

FIG. 2 shows the three basic functions of sunlight having a wavelength of 380 nm to 780 nm.

In this case, when the tristimulus values X , Y , and Z are determined, these three weighting

coefficients can be determined. Therefore, a daylight spectrum corresponding to the tristimulus values X, Y, and Z can be obtained. Tristimulus values X_h , Y_h , and Z_h of the object under the virtual illumination light spectrum $E_h(\lambda)$ is given by

$$\begin{aligned} X_h &= \int_{380}^{780} x(\lambda) E_h(\lambda) f(\lambda) d\lambda \\ Y_h &= \int_{380}^{780} y(\lambda) E_h(\lambda) f(\lambda) d\lambda \\ Z_h &= \int_{380}^{780} z(\lambda) E_h(\lambda) f(\lambda) d\lambda \end{aligned} \quad \dots (4)$$

Although these tristimulus values differ from the tristimulus values X_o , Y_o , and Z_o of the object under the actual observation illumination light, the "appearance" of the object is not influenced by changes in the visual characteristics of the person due to the difference in illumination light.

In this manner, color reproduction free from the influences of changes in the visual characteristics of the person can be performed by reproducing the tristimulus values X, Y, and Z of the object under the virtual illumination light spectrum that provides the same tristimulus values X, Y, and Z as those of the actual observation illumination light without measuring any illumination light spectrum.

As described above, by using daylight basic

functions and the like, color reproduction can be implemented under an illumination light spectrum having excellent characteristics for color evaluation regardless of the characteristics of an illumination light spectrum on the actual observation side.

In addition, by standardizing basic functions for a virtual illumination light spectrum, color reproduction under illumination light having the same tristimulus values X , Y , and Z always reproduces a color under illumination light having the same spectrum. This makes it possible to unify observation illumination conditions for reproduced colors in different observation environments.

Photographing signals R , G , and B of an object with the spectral reflectance $f(\lambda)$ which is photographed under a photographing illumination light spectrum $E_m(\lambda)$ by an RGB camera with spectral sensitivities $r(\lambda)$, $g(\lambda)$, and $b(\lambda)$, and tristimulus values X_{fo} , Y_{fo} , and Z_{fo} of the object under the observation illumination light spectrum $E_o(\lambda)$ can be given by

$$\begin{aligned} R &= \int_{380}^{780} r(\lambda) E_m(\lambda) f(\lambda) d\lambda \\ G &= \int_{380}^{780} g(\lambda) E_m(\lambda) f(\lambda) d\lambda \end{aligned} \quad \dots (5)$$

$$B = \int_{380}^{780} b(\lambda) E_m(\lambda) f(\lambda) d\lambda$$

$$\begin{aligned} X_{fO} &= \int_{380}^{780} x(\lambda) E_O(\lambda) f(\lambda) d\lambda \\ Y_{fO} &= \int_{380}^{780} y(\lambda) E_O(\lambda) f(\lambda) d\lambda \end{aligned} \quad \dots (6)$$

$$Z_{fO} = \int_{380}^{780} z(\lambda) E_O(\lambda) f(\lambda) d\lambda$$

5

In order to obtain the tristimulus values X_{fO} , Y_{fO} , and Z_{fO} of an arbitrary object from the signals R , G , and B , the tristimulus values must be expressed as follows with respect to an arbitrary spectral reflectance $f(\lambda)$:

10

$$\begin{pmatrix} X_{fO} \\ Y_{fO} \\ Z_{fO} \end{pmatrix} = \begin{pmatrix} m_{11} & m_{12} & m_{13} \\ m_{21} & m_{22} & m_{23} \\ m_{31} & m_{32} & m_{33} \end{pmatrix} \begin{pmatrix} R \\ G \\ B \end{pmatrix} \quad \dots (7)$$

That is, the tristimulus values must satisfy

15

$$\begin{pmatrix} x(\lambda) E_O(\lambda) \\ y(\lambda) E_O(\lambda) \\ z(\lambda) E_O(\lambda) \end{pmatrix} = \begin{pmatrix} m_{11} & m_{12} & m_{13} \\ m_{21} & m_{22} & m_{23} \\ m_{31} & m_{32} & m_{33} \end{pmatrix} \begin{pmatrix} r(\lambda) E_m(\lambda) \\ g(\lambda) E_m(\lambda) \\ b(\lambda) E_m(\lambda) \end{pmatrix} \quad \dots (8)$$

In practice, the system rarely satisfies such a condition. However, this condition can be satisfied by replacing the observation illumination light spectrum $E_o(\lambda)$ with the virtual illumination light spectrum $E_h(\lambda)$ that satisfies equation (8).

At this time, the tristimulus values X_{fo} , Y_{fo} , and Z_{fo} of an arbitrary object under the virtual illumination light can be accurately obtained from the signals R, G, and B.

When a color under virtual illumination light different from actual observation illumination light is to be reproduced, the "appearance" of the reproduced color can be kept unchanged under the condition that the tristimulus values X_o , Y_o , and Z_o of the observation illumination light coincide with the tristimulus values X_h , Y_h , and Z_h of the virtual illumination light.

To obtain the virtual illumination light spectrum $E_h(\lambda)$ that satisfies this condition, a spectrum that minimizes an error function E_{XYZ} and value E_{Luther} given by the following equation is obtained by repetitive calculation.

$$E_{XYZ} = [X_o - X_h]^2 + [Y_o - Y_h]^2 + [Z_o - Z_h]^2 \quad \dots(9)$$

$$\begin{aligned}
 E_{\text{Luther}} = & \int_{380}^{780} [x(\lambda)E_h(\lambda) - \{m_{11}r(\lambda) + m_{12}g(\lambda) + m_{13}b(\lambda)\}E_m(\lambda)]^2 d\lambda \\
 & + \int_{380}^{780} [y(\lambda)E_h(\lambda) - \{m_{21}r(\lambda) + m_{22}g(\lambda) + m_{23}b(\lambda)\}E_m(\lambda)]^2 d\lambda \\
 & + \int_{380}^{780} [z(\lambda)E_h(\lambda) - \{m_{31}r(\lambda) + m_{32}g(\lambda) + m_{33}b(\lambda)\}E_m(\lambda)]^2 d\lambda \\
 & \dots (10)
 \end{aligned}$$

$$\begin{aligned}
 \frac{\partial E_{\text{Luther}}}{\partial m_{11}} &= \frac{\partial E_{\text{Luther}}}{\partial m_{12}} = \frac{\partial E_{\text{Luther}}}{\partial m_{13}} \\
 &= \frac{\partial E_{\text{Luther}}}{\partial m_{21}} = \dots = \frac{\partial E_{\text{Luther}}}{\partial m_{33}} = 0 \quad \dots (11)
 \end{aligned}$$

5 If both the function E_{xyz} and the value E_{Luther} are "0",
the tristimulus values of an object having an arbitrary
spectral reflectance under virtual illumination
light are obtained from camera photographing signals.
In this case, the same "appearance" as that under the
10 virtual illumination light can be observed under the
actual observation illumination light.

Consider a case wherein virtual illumination light
is provided as only one predetermined spectrum.

15 In this case, if the virtual illumination light is
standard illumination light, tristimulus values X_s , Y_s ,
and Z_s of the object under a standard illumination
light spectrum $E_s(\lambda)$ is given by

$$\begin{aligned} X_S &= \int_{380}^{780} x(\lambda) E_S(\lambda) f(\lambda) d\lambda \\ Y_S &= \int_{380}^{780} y(\lambda) E_S(\lambda) f(\lambda) d\lambda \quad \dots (12) \\ Z_S &= \int_{380}^{780} z(\lambda) E_S(\lambda) f(\lambda) d\lambda \end{aligned}$$

5 The "appearance" of the color based on the tristimulus values X_S , Y_S , and Z_S under the standard illumination light differs from the "appearance" of the color under observation illumination light having the tristimulus values X , Y , and Z which differ from those of the standard illumination light.

10 The tristimulus values X , Y , and Z of an object whose "appearance" remains unchanged under illumination light having different tristimulus values X , Y , and Z are termed as corresponding colors. The "appearance" of the color of the object under the standard illumination light can be reproduced under the
15 observation illumination light by obtaining and reproducing the corresponding colors of the object having the tristimulus values X_S , Y_S , and Z_S under the observation illumination light.

20 As a method of obtaining corresponding colors, a method of using the human color perception model obtained by modeling a chromatic adaptation mechanism is used.

As such chromatic adaptation models, several

models such as the Von Kries model that is the basis of other models are proposed. Corresponding colors X_C , Y_C , and Z_C based on the Von Kries model and corresponding to the tristimulus values X_S , Y_S , and Z_S of an object under the standard illumination light are given by the following equation, provided that the tristimulus values of the standard illumination light are represented by X_{WS} , Y_{WS} , and Z_{WS} , and the tristimulus values of the observation illumination light are represented by X_{WO} , Y_{WO} , and Z_{WO} .

$$\begin{pmatrix} X_C \\ Y_C \\ Z_C \end{pmatrix} = M^{-1} \begin{pmatrix} \frac{1}{X_{WO}} & 0 & 0 \\ 0 & \frac{1}{Y_{WO}} & 0 \\ 0 & 0 & \frac{1}{Z_{WO}} \end{pmatrix}^{-1} \begin{pmatrix} \frac{1}{X_{WS}} & 0 & 0 \\ 0 & \frac{1}{Y_{WS}} & 0 \\ 0 & 0 & \frac{1}{Z_{WS}} \end{pmatrix} M \begin{pmatrix} X_S \\ Y_S \\ Z_S \end{pmatrix} \quad \dots(13)$$

Note that M represents a 3×3 matrix for converting the tristimulus values X , Y , and Z into the stimulus amount of a cone. In addition to such a chromatic adaptation model based on only the consideration of chromatic adaptation, many color "appearance" models for predicting perception amounts have been provided. These models can be used in accordance with different observation environments.

In this manner, the tristimulus values of the object under the standard illumination light are obtained, and the "appearance" of the color based on

the tristimulus values under the standard illumination light is reproduced under observation illumination light. With this operation, the "appearance" of a color of an object under the same illumination light spectrum can be reproduced under different observation illumination light environments.

This makes it possible to standardize observation illumination light environments for an object independently of illumination light on the photographing side and observation side. If a spectrum having excellent color rendering characteristics is defined as a standard illumination light spectrum used in this case, color reproduction can be performed with an illumination light spectrum having excellent characteristics independently of illumination light on the photographing side and observation side. In this case as well, the spectrum of observation illumination light need not be measured, and the tristimulus values X, Y, and Z can be measured instead.

FIG. 1 shows the arrangement of an image processing apparatus according to the first embodiment of the present invention. FIG. 3 shows the detailed arrangement of a color correction device 5 in FIG. 1 and the flows of data ("[]" indicates the reference symbol of each data in FIG. 3).

The image processing apparatus of this embodiment is designed as a virtual illumination color

reproduction system constituted by a photographing side A and observation side B connected to each other through an arbitrary line capable of transferring data such as image data.

5 The photographing side A includes an RGB color camera 1 for photographing an object 3 under photographing illumination light 2, simplified spectrometer 4 for measuring a photographing illumination light spectrum, and the color correction
10 device 5 for calculating the tristimulus data of the object 3 and converting it into an input signal to a CRT monitor 6 by using monitor profile data. The observation side B includes the CRT monitor 6 and a illumination light colorimeter 7 for measuring the
15 tristimulus values of observation illumination light 8.

 On the photographing side A, the RGB color camera 1 photographs the object 3 under the photographing illumination light 2 to obtain an RGB image. The simplified spectrometer 4 then measures
20 photographing illumination light spectrum data [MS]. For example, this simplified spectrometer 4 is designed to measure the radiation intensity of an illumination light spectrum in the wavelength range of 380 nm to 780 nm in 1-nm intervals. Obtained RGB image data
25 [CRGB] and photographing illumination light spectrum data are sent to the color correction device 5.

 On the observation side B, the illumination light

colorimeter 7 mounted on the CRT monitor 6 measures tristimulus values [XYZ] of the observation illumination light 8.

5 The illumination light colorimeter 7 is made up of three sensors respectively having spectral sensitivities approximated to tristimulus value XYZ color matching functions by three filters (not shown), and measures the tristimulus values X, Y, and Z of the observation illumination light 8 near the CRT monitor 6.

10 The tristimulus values X, Y, and Z of the observation illumination light 8 are sent to the color correction device 5 on the photographing side. The color correction device 5 calculates spectral reflectance data [f] of the object 3 from spectral
15 sensitivity data [h] of the RGB color camera 1 and object characteristic data [σ] which are stored in advance.

Virtual illumination light spectrum data [OS] is calculated from the tristimulus value data of the
20 observation illumination light 8 measured by the illumination light colorimeter 7 and a basic function [ρ] stored in advance. Tristimulus value data [OXYZ] of the object 3 is calculated from the spectral reflectance data of the object 3, color matching
25 function data [CMF] stored in advance, and the calculated virtual illumination light spectrum data.

The obtained tristimulus value data of the

object 3 is converted into an input signal [MRGB] to
the CRT monitor 6 by using monitor profile data [MTP].
This input signal is then sent to the CRT monitor 6.
The observer observes the color image of the object 3
5 displayed on the CRT monitor 6 under the observation
illumination light 8.

The detailed arrangement of the color correction
device 5 will be described next with reference to
FIG. 3.

10 The color correction device 5 is made up of
a spectral reflectance calculator 9 for calculating the
spectral reflectance data of an object from RGB image
data, virtual illumination light spectrum calculator 10
for calculating a virtual illumination light spectrum
15 from the tristimulus value data of the observation
illumination light 8, tristimulus value calculator 11
for calculating the tristimulus values of the object 3
from the spectral reflectance data of the object 3,
output signal calculator 12 for converting the
20 tristimulus values of the object 3 into an input signal
to the CRT monitor 6, and storage device 13.

In this arrangement, the spectral reflectance
calculator 9 calculates a spectral reflectance $f(\lambda)$ of
the object 3 from the RGB image data input from the RGB
25 color camera 1 by using photographing illumination
light spectrum data $S_M(\lambda)$ measured by the simplified
spectrometer 4, the object characteristic data stored

in the storage device 13, and the spectral sensitivity data of the RGB color camera 1.

The photographing illumination light spectrum data $S_M(\lambda)$ has radiation intensity data at 1-nm intervals in the wavelength range of 380 nm to 780 nm.

The object characteristic data is comprised of three basic function data $\sigma_1(\lambda)$, $\sigma_2(\lambda)$, and $\sigma_3(\lambda)$ of the spectral reflectance of the object 3. Each basic function has values at 1-nm intervals in the wavelength range from 380 nm to 780 nm. Each basic function is formed in accordance with the type of object, and an eigenvector of the correlation matrix of a spectral reflectance.

The spectral reflectance of an object can be expressed by the linear sum of basic functions. The spectral sensitivity data of the RGB camera has sensitivity value data at 1-nm intervals in the wavelength range from 380 nm to 780 nm of $h_R(\lambda)$, $h_G(\lambda)$, and $h_B(\lambda)$ for each of R, G, and B channels.

The spectral reflectance calculator 9 calculates the spectral reflectance $f(\lambda)$ according to the following equations:

$$f(\lambda) = \sigma \cdot (D^{-1}C) \quad \dots(14)$$

$$\sigma = (\sigma_1(\lambda), \sigma_2(\lambda), \sigma_3(\lambda))$$

$$C = (R, G, B)^t$$

$$D = \begin{pmatrix} \int_{380}^{780} h_r(\lambda) \sigma_1(\lambda) S_m(\lambda) d\lambda & \int_{380}^{780} h_r(\lambda) \sigma_2(\lambda) S_m(\lambda) d\lambda & \int_{380}^{780} h_r(\lambda) \sigma_3(\lambda) S_m(\lambda) d\lambda \\ \int_{380}^{780} h_g(\lambda) \sigma_1(\lambda) S_m(\lambda) d\lambda & \int_{380}^{780} h_g(\lambda) \sigma_2(\lambda) S_m(\lambda) d\lambda & \int_{380}^{780} h_g(\lambda) \sigma_3(\lambda) S_m(\lambda) d\lambda \\ \int_{380}^{780} h_b(\lambda) \sigma_1(\lambda) S_m(\lambda) d\lambda & \int_{380}^{780} h_b(\lambda) \sigma_2(\lambda) S_m(\lambda) d\lambda & \int_{380}^{780} h_b(\lambda) \sigma_3(\lambda) S_m(\lambda) d\lambda \end{pmatrix} \dots (15)$$

5

where \cdot represents an inner product, t represents transposition, and -1 represents an inverse matrix.

The virtual illumination light spectrum calculator 10 receives tristimulus values X_{wo} , Y_{wo} , and Z_{wo} of observation illumination light measured by the illumination light colorimeter 7 and predetermined basic functions $\rho_1(\lambda)$, $\rho_2(\lambda)$, and $\rho_3(\lambda)$ of a daylight spectrum from the storage device 13, and outputs a virtual illumination light spectrum $E_h(\lambda)$.

15 The virtual illumination light spectrum $E_h(\lambda)$ is the linear sum of the basic functions $\rho_1(\lambda)$, $\rho_2(\lambda)$, and $\rho_3(\lambda)$. The tristimulus values based on the virtual illumination light spectrum $E_h(\lambda)$ are the tristimulus values X_{wo} , Y_{wo} , and Z_{wo} of the observation illumination light 8 and calculated according to equations (2) and (3).

20

The tristimulus value calculator 11 calculates

the tristimulus values X , Y , and Z of the object 3
under the virtual illumination light spectrum from
the spectral reflectance $f(\lambda)$ of the object 3
calculated by the spectral reflectance calculator 9,
5 color matching function data $x(\lambda)$, $y(\lambda)$, and $z(\lambda)$
stored in the storage device 13 in advance, and the
virtual illumination light spectrum $E_h(\lambda)$ calculated by
the virtual illumination light spectrum calculator 10.

Tristimulus values X_h , Y_h , and Z_h of the object
10 under a virtual illumination light spectrum are
calculated according to equations (4).

The output signal calculator 12 converts the
tristimulus values X_h , Y_h , and Z_h of the object 3 into
input signals R_m , G_m , and B_m for display on the CRT
15 monitor 6 by using monitor profile data.

The monitor file data is made up of a 3×3 matrix
and R , G , and B tone correction data. As this data,
data obtained in advance by measurement is stored in
the storage device 13. The tristimulus values X_h , Y_h ,
20 and Z_h are converted into values R_L , G_L , and B_L having
a linear relationship with the values X_h , Y_h , and Z_h by
matrix conversion. The values R_L , G_L , and B_L are
converted into input signal values R_m , G_m , and B_m by
the inverse functions of $\gamma_r[R]$, $\gamma_g[G]$, and $\gamma_b[B]$ that
25 define the relationship between output luminances and R ,
 G , and B inputs to the CRT monitor. The input signals
 R_m , G_m , and B_m are calculated from the tristimulus

values X_h , Y_h , and Z_h according to the following equation:

$$\begin{aligned} R_m &= \gamma_r^{-1}[R_L] \\ G_m &= \gamma_g^{-1}[G_L] \\ B_m &= \gamma_b^{-1}[B_L] \end{aligned} \quad \dots(16)$$

5

$$\begin{pmatrix} R_L \\ G_L \\ B_L \end{pmatrix} = \begin{pmatrix} m_{xr} & m_{yr} & m_{zr} \\ m_{xg} & m_{yg} & m_{zg} \\ m_{xb} & m_{yb} & m_{zb} \end{pmatrix} \begin{pmatrix} X_h \\ Y_h \\ Z_h \end{pmatrix} \quad \dots(17)$$

10 The input signals R_m , G_m , and B_m calculated by the color correction device 5 are output to the CRT monitor 6. The CRT monitor 6 displays a color image having each pixel represented by the input signals R_m , G_m , and B_m . The observer observes the image under the observation illumination light 8. In order to allow the observer to adapt to the observation illumination light 8 during observation, the CRT monitor 6 does not display "white" unique to the CRT monitor 6

15 FIG. 4 shows the arrangement of a color correction device for an image processing apparatus according to the second embodiment of the present invention. Since the arrangement of this embodiment is the same as that of the first embodiment described with reference to FIG. 1 except for the color correction device, the same reference numerals as in FIG. 1 denote the same parts in FIG. 4. This color correction device will be

described in detail below. "[]" indicates the reference symbol of each data shown in FIG. 4.

A color correction device 14 of this embodiment is comprised of a virtual illumination light spectrum calculator 10 for forming a tristimulus value XYZ conversion matrix under virtual illumination light from the R, G, and B values of a camera photographing signal, tristimulus value calculator 11 for calculating the tristimulus values of an object under virtual illumination light, output signal calculator 12 for converting the tristimulus values of an object 3 into an input signal [MRGB] to a CRT monitor 6, and storage device 13.

Each component of the above color correction device will be described in detail below.

The virtual illumination light spectrum calculator 10 generates a virtual illumination light spectrum from photographing illumination light spectrum data [MS] measured by a simplified spectrometer 4, spectral sensitivity data [h] of an RGB color camera 1 which is stored in the storage device 13 in advance, color matching function data [CMF], and tristimulus values [IXYZ] of observation illumination light which are obtained by an illumination light colorimeter 7, and also forms a conversion matrix [MTX] for calculating tristimulus values X_h , Y_h , and Z_h [OXYZ] of the object under virtual illumination light.

Note that the virtual illumination light spectrum is obtained such that the values given by equations (9) and (10) are minimized or become equal to or less than a threshold. Such a spectrum is obtained by adjusting the spectrum value of each wavelength and repeatedly calculating the evaluation values of equations (9) and (10). A matrix having values m_{11} to m_{33} calculated by equation (11) as elements in the virtual illumination light spectrum determined in this manner is output to the tristimulus value calculator 11.

The tristimulus value calculator 11 converts the RGB image data obtained by the RGB color camera 1 into tristimulus values X, Y, and Z using the conversion matrix obtained by the virtual illumination light spectrum calculator 10.

The output signal calculator 12 is equivalent to the output signal calculator 12 shown in FIG. 2, and a description thereof will be omitted.

FIG. 5 shows the arrangement of a color correction device for an image processing apparatus according to the third embodiment of the present invention. Since the arrangement of this embodiment is the same as that of the first embodiment described with reference to FIG. 2 except for the color correction device, the same reference numerals as in FIG. 2 denote the same parts in FIG. 5. This color correction device will be described in detail below. "[]" indicates the

reference symbol of each data shown in FIG. 5.

A color correction device 15 is comprised of a spectral reflectance calculator 9 for calculating spectral reflectance data $[f]$ of an object 3 (not shown) from RGB image data, tristimulus value calculator 16 for calculating tristimulus values $[SXYZ]$ of the object 3 under standard illumination light from the spectral reflectance data of the object 3, corresponding color calculator 17 for calculating tristimulus values $[CXYZ]$ of a corresponding color of the object under observation illumination light from the tristimulus values under the standard illumination light, output signal calculator 12 for converting the tristimulus values of the corresponding color into an input signal $[MRGB]$ to a CRT monitor 6, and storage device 13.

The tristimulus value calculator 16 and corresponding color calculator 17 in the color correction device 15 which are different from those in FIG. 3 will be described below.

The tristimulus value calculator 16 calculates tristimulus values X_S , Y_S , and Z_S $[SXYZ]$ of the object 3 under standard illumination light on the basis of spectral reflectance data $f(\lambda)$ $[f]$ of the object 3 calculated by the spectral reflectance calculator 9, together with color matching function data $x(\lambda)$, $y(\lambda)$, and $z(\lambda)$ $[CMF]$ and standard illumination light spectrum

data $E_s(\lambda)$ [SS] which are stored in advance. CIE D65 spectrum distribution data for the standard illumination light spectrum $E_s(\lambda)$ are given at 1-nm intervals in the wavelength range from 380 nm to 780 nm.

5 The CIE D65 spectrum distribution is defined by relative values. In this case, however, this data is defined by absolute value data suited to the observation environment for the standard CRT monitor 6.

10 The corresponding color calculator 17 converts the tristimulus values X_S , Y_S , and Z_S of the object 3 under standard illumination light which are calculated by the tristimulus value calculator 16 into a corresponding color under observation illumination light.

15 Tristimulus values X_{WS} , Y_{WS} , and Z_{WS} [JXYZ] of standard illumination light are input from the storage device 13, and tristimulus values X_{WO} , Y_{WO} , and Z_{WO} [IXYZ] of observation illumination light are input from an illumination light colorimeter 7.

20 Tristimulus values X_C , Y_C , and Z_C of the corresponding color are calculated according to equation (13). The data of a matrix M represented by equation (13) is stored in the corresponding color calculator 17, and the following value is stored.

25
$$M = \begin{pmatrix} 0.071 & 0.94 & -0.016 \\ -0.461 & 1.360 & 0.101 \\ 0.000 & 0.000 & 1.00 \end{pmatrix} \quad \dots(18)$$

The tristimulus values X_C , Y_C , and Z_C [CXYZ] of the corresponding color are converted into monitor input signals R_m , G_m , and B_m [MRGB] by using a monitor profile. The color image having each pixel made of
5 R_m , G_m , and B_m is displayed on the CRT monitor 6. The observer then observes the color image displayed on the CRT monitor 6 under observation illumination light.

The observer can therefore observe the
10 "appearance" of the color of the object, which is obtained under the standard illumination light, under the observation illumination light.

FIG. 6 shows an example of how an image processing according to the fourth embodiment of the present
15 invention is used.

In this embodiment, for example, a patient 23 as an object is photographed by a multispectral camera (MSC) 24 in a clinic 21 to obtain a still image.

The MSC 24 has a filter turret 26, as shown in
20 FIG. 8. Seven interference filters 25 having different transmission wavelength bands are loaded in the filter turret 26, as shown in FIG. 7. The MSC 24 receives an optical image having passed through a photographing lens 41 as 7-channel image data by using a CCD 42
25 in synchronism with the filter turret 26 rotated by a motor 40.

The image data of the patient 23 photographed

by the MSC 24 is loaded as 7-channel still image data into a computer 27. A white background plate 28 whose spectral reflectance can be regarded as a uniform value is placed behind the patient 23.

5 A spectrometer 29 juxtaposed with the multispectral camera 24 measures the reflected light spectrum of photographing illumination light from the background plate 28.

10 The measurement data is loaded into the computer 27 and divided by the spectral reflectance of the background plate 28 which is stored in advance, thereby calculating a photographing illumination light spectrum. The clinic 21 is connected to a hospital 31 through a communication line 32. The tristimulus values X, Y,
15 and Z of the observation illumination light 35 measured by an observation illumination light measuring device 34 placed near a CRT monitor 33 in the hospital 31 are sent to the clinic 21 through the communication line 32.

20 Assume that a virtual illumination light spectrum $E_h(\lambda)$ is generated by the same method as that in the first embodiment on the basis of tristimulus values X, Y, and Z of observation illumination light 35.

25 After the virtual illumination light spectrum is calculated, the XYZ image data of the object 23 is calculated on the basis of virtual illumination light spectrum data, photographing data, the spectral sensitivity data of the multispectral camera 24 which

is stored in the computer 27 in advance, and object characteristic data. The XYZ image data is then sent to the computer 36 in the hospital 31 through the communication line 32. The tristimulus values X, Y, and Z are calculated according to equations (19) and (20).

$$\begin{pmatrix} X \\ Y \\ Z \end{pmatrix} = AB^{-1} \begin{pmatrix} g_1 \\ g_2 \\ g_3 \\ \vdots \\ g_7 \end{pmatrix} \quad \dots(19)$$

Elements a_{ij} and b_{ij} of matrices A and B are given by

$$a_{ij} = \int_{\lambda=380}^{780} \int_{\lambda'=380}^{780} E_h(\lambda) x_i(\lambda) \langle f(\lambda) f(\lambda') \rangle E_m(\lambda') h_j(\lambda') d\lambda d\lambda'$$

$$b_{ij} = \int_{\lambda=380}^{780} \int_{\lambda'=380}^{780} E_m(\lambda) h_i(\lambda) \langle f(\lambda) f(\lambda') \rangle E_m(\lambda') h_j(\lambda') d\lambda d\lambda' \quad \dots(20)$$

In this case, "<>" indicates expected value calculation, and object characteristics $\langle f(\lambda) f(\lambda') \rangle$ represents the expected value of the spectral reflectance of the skin, which is important for diagnosis and stored in advance in a storage device as a database. The CRT monitor 33 in the hospital 31 converts the XYZ image data of the patient 23, which is sent from the clinic 21, into an RGB input signal to the CRT monitor 33 by using the profile data of the CRT monitor 33 which is stored in advance.

The RGB input signal image of the patient 23 is displayed on the CRT monitor 33. An observer 37 such as a doctor observes the color image on the CRT monitor 33 under the observation illumination light 35.

5 A white background plate 38 is placed behind the CRT monitor 33 in the hospital 31, and consideration is given to the observer 37 to allow him/her to adapt to reflected light of the observation illumination light 35 from the background plate 38.

10 If a spectral reflectance $p(\lambda)$ of the background plate 38 is not a uniform value, tristimulus values x_o , y_o , and z_o of the observation illumination light 35, which are used to calculate a virtual illumination light spectrum, are replaced with tristimulus values x_b , y_b , and z_b of the background plate 38 which are given
15 by

$$\begin{aligned}x_b &= \int_{380}^{780} x(\lambda)E_o(\lambda)p(\lambda)d\lambda \\y_b &= \int_{380}^{780} y(\lambda)E_o(\lambda)p(\lambda)d\lambda \quad \dots(21) \\z_b &= \int_{380}^{780} z(\lambda)E_o(\lambda)p(\lambda)d\lambda\end{aligned}$$

20 The observation illumination light measuring device 34 directly measures the tristimulus values of the observation illumination light 35 or reflected light of the observation illumination light 35 from the

background plate 38 which are given by equations (21).

Assume that the observation illumination light measuring device 34 also serves as a measuring device for generating the monitor profile of the CRT monitor 33.

FIG. 9 shows an image processing apparatus according to the fifth embodiment of the present invention. This embodiment of the present invention has the following arrangement. In the fourth embodiment described above, the observation illumination light measuring device is used as a device for measuring the tristimulus values of observation illumination light.

To accurately measure the tristimulus values of observation illumination light, the spectral sensitivity of the observation illumination light measuring device must have a linear conversion relationship with a color matching function.

As a substitute for a measuring device having such special sensitivity characteristics, a combination of a color chart 39 including nine color chips whose spectral reflectances are known and a known digital camera 40 is used. The color chart 39 is placed near the CRT monitor, and the reflected light of observation illumination light reflected by each color chip is photographed by the digital camera 40. The photographing signal based on each color chip

is sent to a computer 36 in a hospital 31 through
a communication line 41. An illumination light
tristimulus value calculating/processing section of
the computer 36 in the hospital 31 calculates the
5 tristimulus values of observation illumination light
from the photographing signal based on each color chip,
the spectral sensitivity data of the digital camera 40
which is stored in advance, the spectral reflectance
data of each color chip, and color matching function
10 data, and sends the tristimulus values to a computer in
a clinic (not shown) through a communication line 42.
FIG. 10 shows the arrangement of the illumination light
tristimulus value calculating/processing section.

A conversion matrix calculator 51 calculates
15 a conversion matrix MTX for converting photographing
signals R, G, and B of the respective color chips,
which are sent from a color chip photographing signal
input section 55, into tristimulus values X, Y, and Z
of observation illumination light. The conversion
20 matrix calculator 51 calculates this matrix from
spectral sensitivity data h of the digital camera 40
which is stored in advance in a digital camera spectral
sensitivity data storage section 54 placed in the
computer 36, spectral reflectance data CSR of each
25 color chip stored in a color chip spectral reflectance
data storage section 53 in advance, and color matching
function data CMF stored in a color matching function

data storage section 52 in advance.

The above conversion matrix MTX is calculated by

$$M = \begin{pmatrix} C_{x1} & C_{x2} & \dots & C_{x27} \\ C_{y1} & C_{y2} & \dots & C_{y27} \\ C_{z1} & C_{z2} & \dots & C_{z27} \end{pmatrix}$$

$$\frac{\partial E_x}{\partial C_{xk}} = \frac{\partial E_y}{\partial C_{yk}} = \frac{\partial E_z}{\partial C_{zk}} \quad (k = 1 - 27)$$

$$E_i = \int_{\lambda=380}^{780} \left\{ xyzi(\lambda) - \sum_{k=1}^{27} C_{ik} S_k(\lambda) \right\}^2 d\lambda \quad (i = x, y, z)$$

$$S_k(\lambda) = k_i(\lambda) f_j(\lambda) \quad (k = k(i, j))$$

5

where $xyzi(\lambda)$ ($i = x, y, z$) is a color matching function, $hi(\lambda)$ ($i = 1$ to 3) is the spectral sensitivity of the digital camera 40, and $fj(\lambda)$ ($j = 1$ to 9) is the spectral reflectance of each color chip.

10

The conversion matrix MTX calculated by the conversion matrix calculator 51 is sent to a tristimulus value calculator 56. The tristimulus value calculator 56 calculates the average signal value of each color chip from the color chip images input from the color chip photographing signal input section 55, and calculates the tristimulus values X, Y, and Z of observation illumination light by multiplying each average signal value by the conversion matrix MTX. The tristimulus value calculator 56 then stores the tristimulus values X, Y, and Z in a tristimulus value storage section 57.

20

In this embodiment, nine color chips are used. However, the number of color chips is not limited to this. In addition, a digital camera having sensitivities corresponding to three channels may be
5 used as a multispectral camera; or digital camera having four channels or more, as on the photographing side.

If the tristimulus values of observation illumination light are measured by using a digital
10 camera and color chips in this manner, any expensive measuring device need not be used. In addition, since the spectral sensitivity characteristics of a general digital camera generally has no linear conversion relationship with a color matching function,
15 tristimulus values cannot be accurately measured. However, with a combination of a digital camera and color chips, tristimulus values can be measured with higher precision.

As has been described in detail above, according
20 to the present invention, there is provided a color reproduction system which can replace measurement of an observation illumination light spectrum with simpler measurement of tristimulus values, and can perform illumination conversion that can reproduce a color of
25 an object under an illumination light spectrum suited to color reproduction.

Additional advantages and modifications will

readily occur to those skilled in the art. Therefore,
the invention in its broader aspects is not limited to
the specific details and representative embodiments
shown and described herein. Accordingly, various
5 modifications may be made without departing from the
spirit or scope of the general inventive concept as
defined by the appended claims and their equivalents.

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
222

CLAIMS

1. A color reproduction system comprising:
color image input means for sensing an object;
color estimation means for calculating tristimulus
5 values from a color image signal obtained by said color
image input means; and
color image output means for outputting a color
image signal based on a color represented by the
tristimulus values obtained by said color estimation
10 means,
said color estimation means including
illumination light measuring means for measuring
tristimulus values of observation illumination light,
virtual illumination light spectrum calculation
15 means for calculating a virtual illumination light
spectrum that provides tristimulus values equal to the
tristimulus values of the observation illumination
light which are obtained by said illumination light
measuring means, and
20 tristimulus value calculation means for
calculating tristimulus values of the object under the
virtual illumination light spectrum from the color
image signal.
2. A system according to claim 1, wherein
25 said virtual illumination light spectrum calculation
means calculates a spectrum from a linear sum of
predetermined illumination light spectrum basic

functions.

3. A system according to claim 1, wherein
said virtual illumination light spectrum calculation
means calculates a spectrum corresponding to linear
5 conversion between a product of a spectral sensitivity
of said color image input means and a photographing
illumination light spectrum and a product of a color
matching function and the virtual illumination light
spectrum.

10 4. A system according to claim 1, wherein said
color image input means and said illumination light
measuring means are positioned under different kinds of
illumination light.

5. A color reproduction system comprising:
15 color image input means for sensing an object;
color estimation means for calculating tristimulus
values from a color image signal obtained by said color
image input means; and

color image output means for outputting a color
20 based on the tristimulus values obtained by said color
estimation means,

said color estimation means including
illumination light measuring means for measuring
tristimulus values of observation illumination light;
25 tristimulus value calculating means for
calculating tristimulus values of the object under
a predetermined standard illumination light spectrum

from the color image signal, and

corresponding color calculation means for
calculating tristimulus values that provide
"appearance" of the color of the object which is
5 based on the tristimulus values under the standard
illumination light spectrum.

6. A color reproduction system which can sense
a predetermined object as a color image, perform color
correction of the sensed color image, and perform data
10 transfer through a line, comprising:

a color camera for sensing the object under
photographing illumination light;

a simplified spectrometer for measuring a spectrum
of the photographing illumination light;

15 an illumination light colorimeter for measuring
tristimulus values of observation illumination light
on an object observation side, and transferring the
tristimulus value data of the observation illumination
light to a color correction device through a line;

20 a color correction device for calculating
tristimulus values of the object under the virtual
illumination light spectrum generated on the basis of
the transferred tristimulus values of the observation
illumination light, and converting the tristimulus
25 values into a monitor signal by using monitor profile
data; and

a monitor for displaying a color image including

an object image color-corrected by said color correction device.

7. A system according to claim 5, wherein said color correction device comprises:

5 a storage device storing a basic function ρ of a daylight spectrum, monitor profile data MTP, color matching function data CMF, and spectral sensitivity data h of said RGB color camera in advance;

10 a virtual illumination light spectrum calculator for calculating virtual illumination light spectrum data OS from tristimulus values IXYZ of observation illumination light measured by said illumination light colorimeter and the basic function ρ from said storage device;

15 a spectral reflectance calculator for calculating spectral reflectance data f of the object from object characteristic data σ and the spectral sensitivity data h from said storage device, RGB image data CRGB input from said RGB color camera, and a photographing
20 illumination light spectrum from a simplified spectrometer;

 a tristimulus value calculator for calculating tristimulus value data OXYZ of the object from the color matching function data CMF from said storage
25 device, the virtual illumination light spectrum data OS from said virtual illumination light spectrum calculator, and the spectral reflectance data f from

said spectral reflectance calculator; and

an output signal calculator for calculating the
RGB image data CRGB serving as the monitor signal from
the monitor profile data MTP from said storage device
5 and the tristimulus value data OXYZ from said
tristimulus value calculator.

8. A system according to claim 5, wherein said
color correction device comprises:

a storage device storing the monitor profile data
10 MTP, the color matching function data CMF, and the
spectral sensitivity data h of said RGB color camera in
advance;

a virtual illumination light spectrum calculator
for calculating a conversion matrix MTX from the
15 tristimulus values IXYZ of the observation illumination
light measured by said illumination light measuring
device, the monitor profile data MTP from said storage
device, and the color matching function data CMF;

a tristimulus value calculator for calculating the
20 tristimulus value data OXYZ of the object from the
conversion matrix MTX from said virtual illumination
light spectrum calculator and the RGB image data CRGB
input from said RGB color camera; and

an output signal calculator for calculating RGB
25 image data CRGB serving as the monitor signal from the
monitor profile data MTP from said storage device and
the tristimulus value data OXYZ from said tristimulus

value calculator.

9. A system according to claim 5, wherein said color correction device comprises:

5 a storage device storing object characteristic data σ , monitor profile data MTP, color matching function data CMF, standard illumination light spectrum data SS, tristimulus values JXYZ of standard illumination light, and spectral sensitivity data h of said RGB color camera;

10 a spectral reflectance calculator for calculating spectral reflectance data f of the object from the object characteristic data σ and spectral sensitivity data h from said storage device, RGB image data CRGB input from said RGB color camera, and photographing
15 illumination light spectrum data MS from said simplified spectrometer;

a tristimulus value calculator for calculating tristimulus values SXYZ of the object under standard illumination light from the spectral reflectance data f
20 from said spectral reflectance calculator and the color matching function data CMF and standard illumination light spectrum data SS from said storage device;

a corresponding color calculator for calculating tristimulus values CXYZ of a corresponding color of
25 said object from the tristimulus values SXYZ from said tristimulus value calculator, tristimulus values JXYZ of standard illumination light from said storage device,

and tristimulus values IXYZ of observation illumination light from said illumination light colorimeter; and

an output signal calculator for calculating RGB image data CRGB serving as the monitor signal from the
5 tristimulus values CXYZ from said corresponding color calculator and the monitor profile data MTP from said storage device.

10. A system according to claim 5, wherein said color camera and said monitor are positioned under
10 different kinds of illumination light, and image propagation is performed by wire communication.

11. A system according to claim 5, wherein said color camera and said monitor are positioned under
different kinds of illumination light, and image
15 propagation is performed by radio communication.

12. A system according to claim 6, wherein said system comprises a plurality of color chips, each having a known spectral reflectance, and a digital camera having a known spectral sensitivity in place of
20 said illumination light colorimeter, and

said color chips are arranged near said monitor and reflected light of observation illumination light reflected by each color chip is photographed by said digital camera, thereby calculating tristimulus
25 values of the observation illumination light from a photographing signal of each color chip which is obtained by photographing, spectral sensitivity data of

said digital camera, spectral reflectance data of each color chip, and color matching data.

1. The color matching data is used to determine the color of the color chip. The color matching data is used to determine the color of the color chip. The color matching data is used to determine the color of the color chip.

ABSTRACT OF THE DISCLOSURE

This invention includes an RGB color camera for photographing an object under photographing illumination light, simplified spectrometer for measuring a photographing illumination light spectrum, and color correction device for calculating tristimulus value data of the object and converting the data into an input signal to a CRT monitor by using monitor profile data. On the observation side, a CRT monitor and illumination light colorimeter for measuring the tristimulus values of observation illumination light are arranged. A color correction device can perform color reproduction without being influenced by changes in the color perception characteristics of a person such as color adaptation by reproducing a virtual illumination light spectrum having tristimulus values equal to those of the observation illumination light without measuring any observation illumination light spectrum.

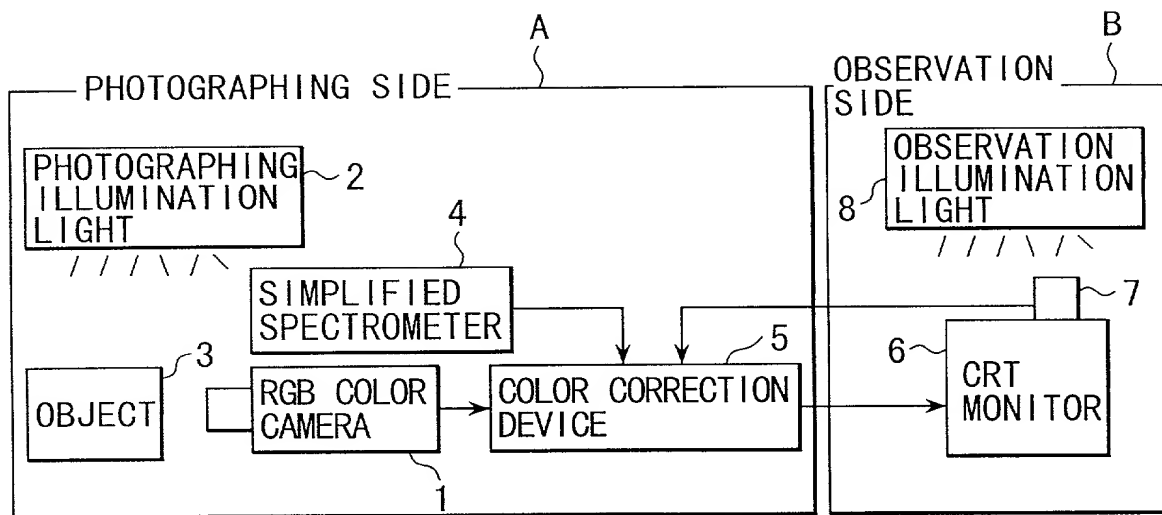


FIG. 1

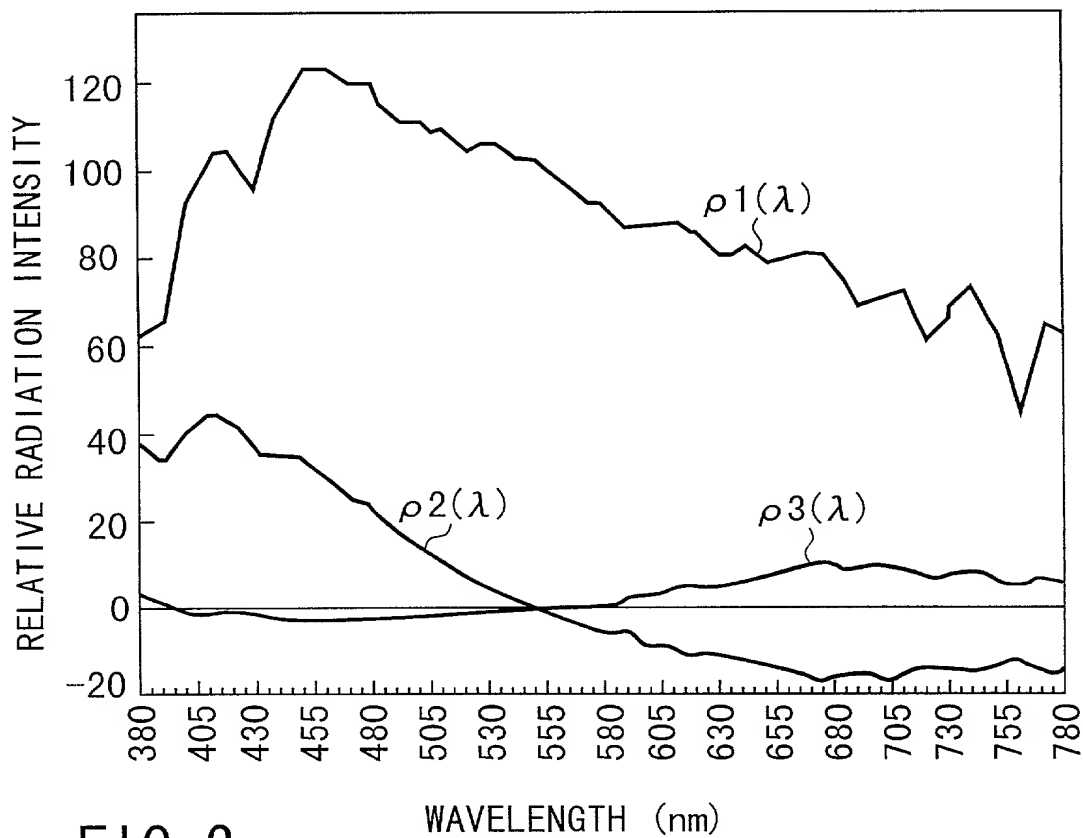


FIG. 2

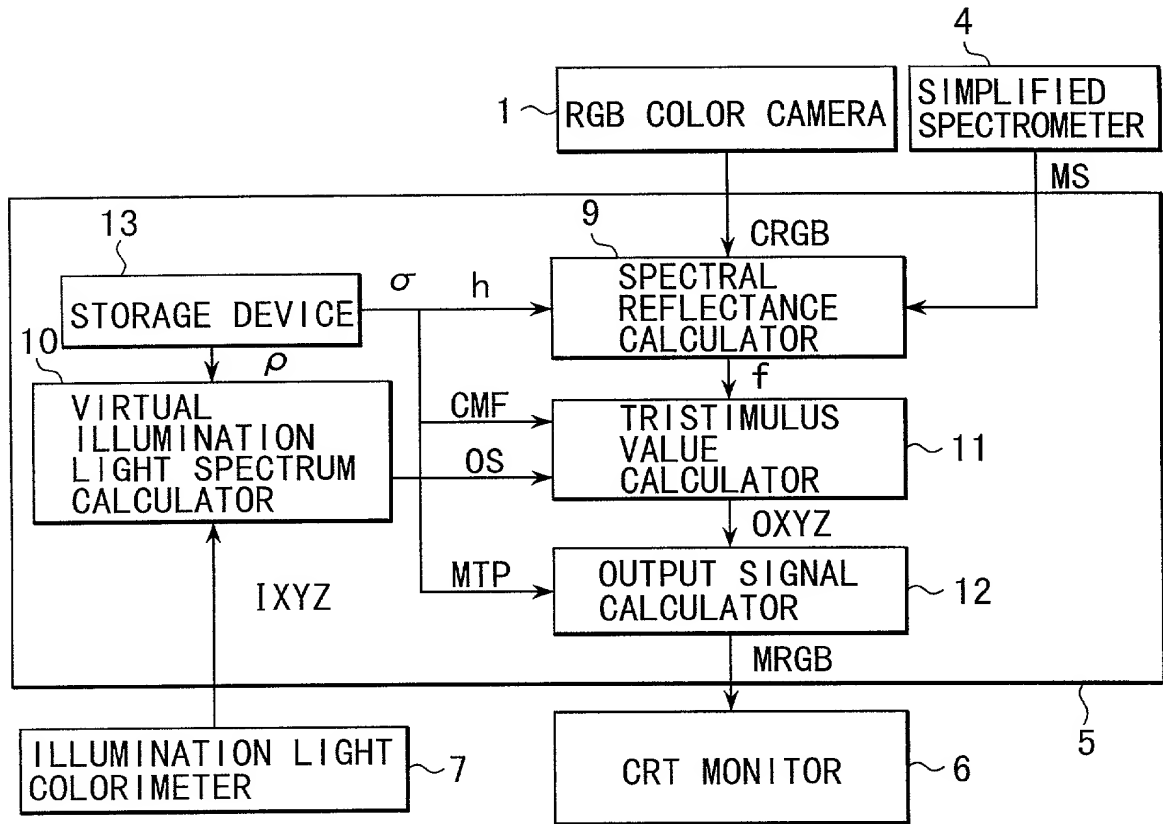


FIG. 3

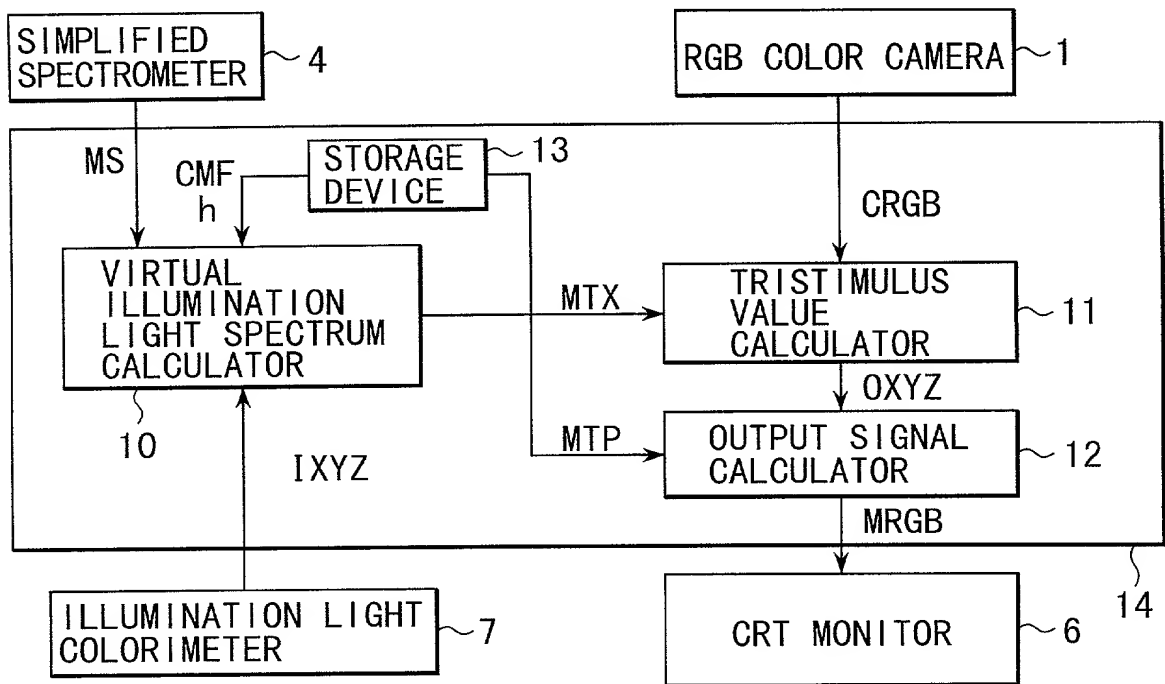


FIG. 4

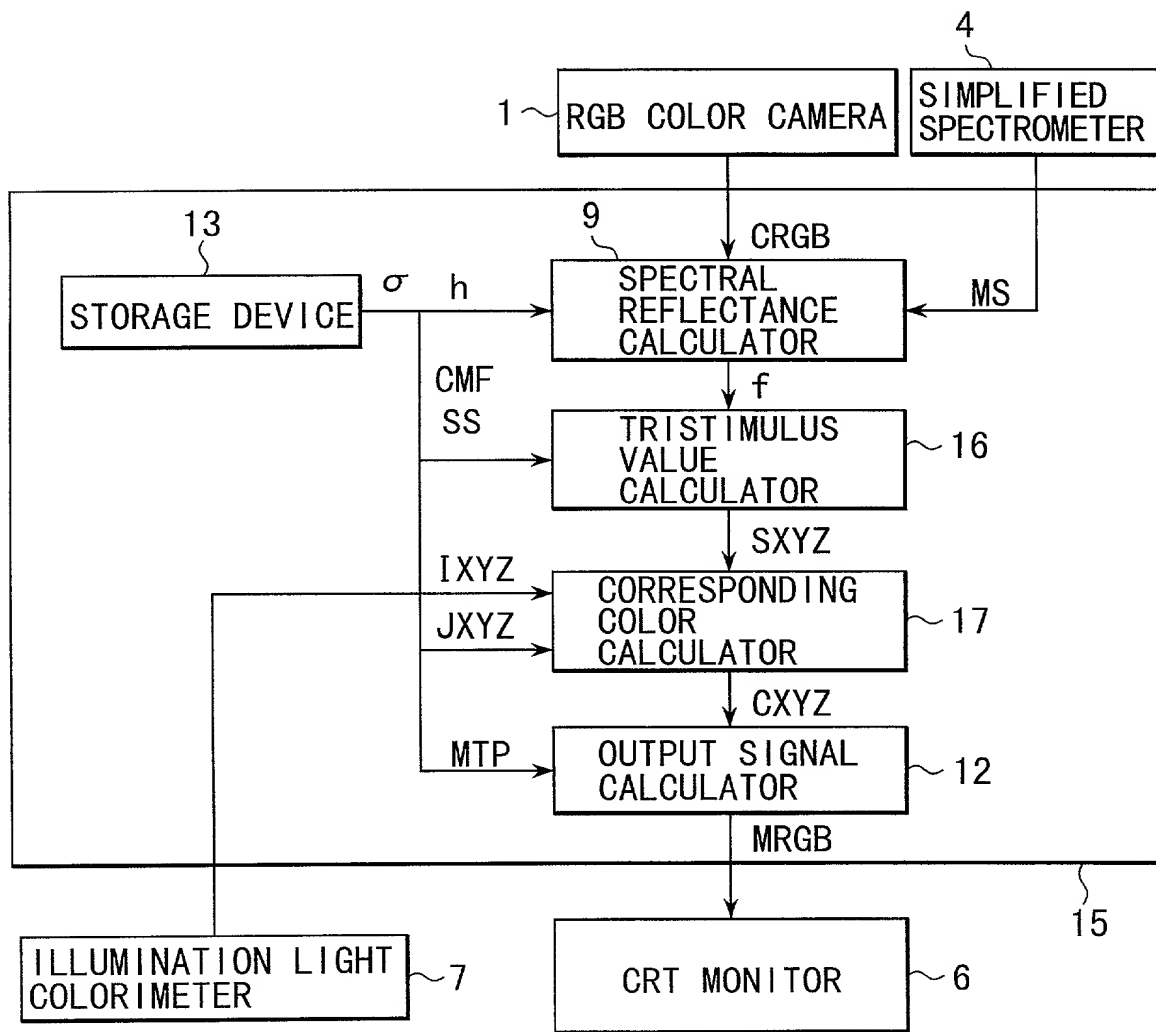


FIG. 5

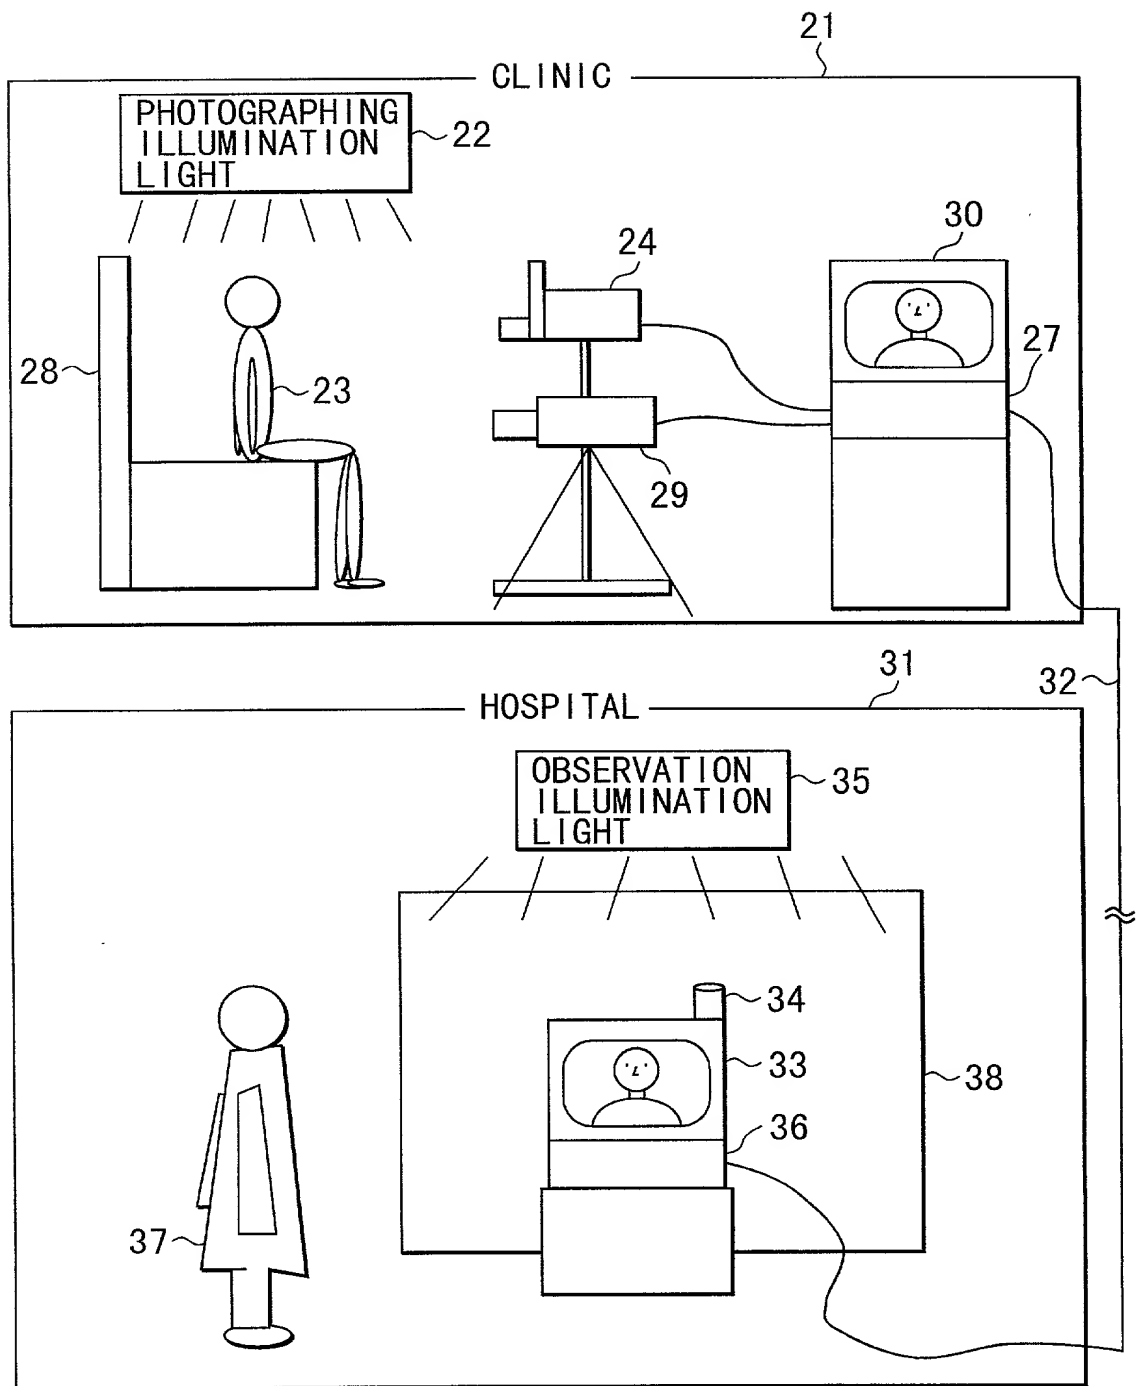


FIG. 6

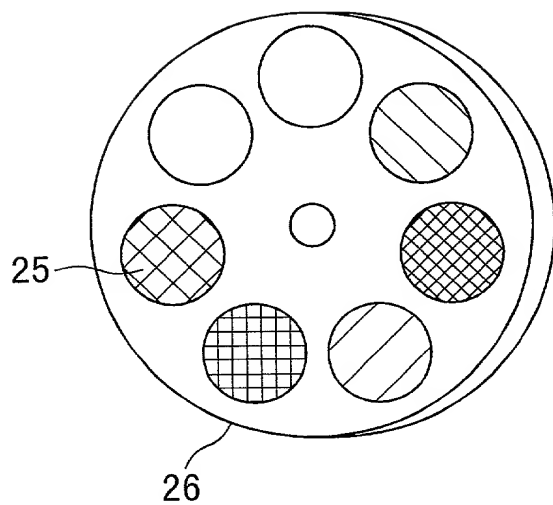


FIG. 7

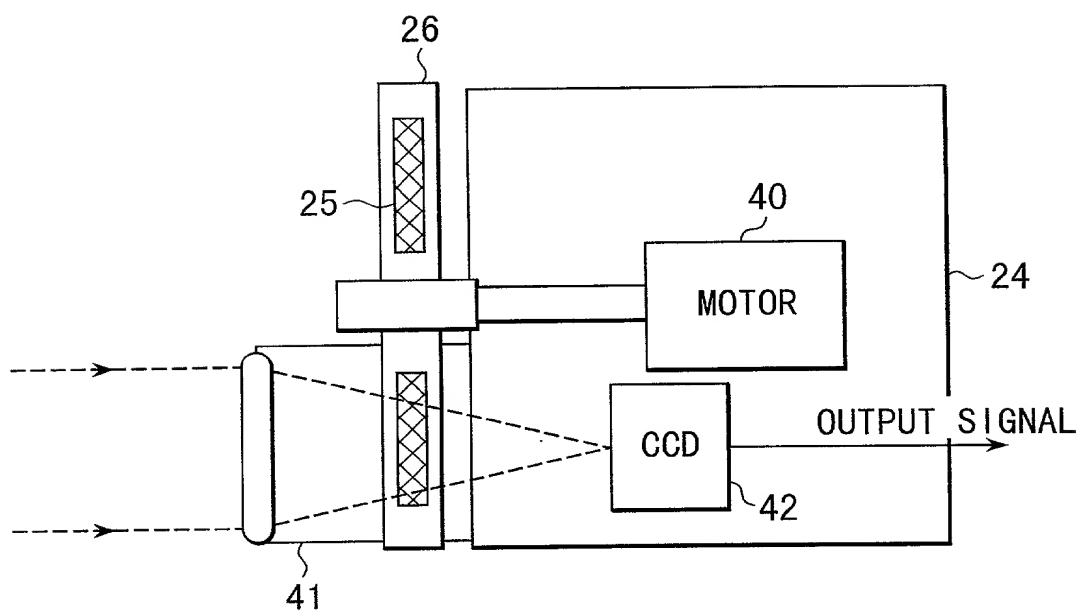


FIG. 8

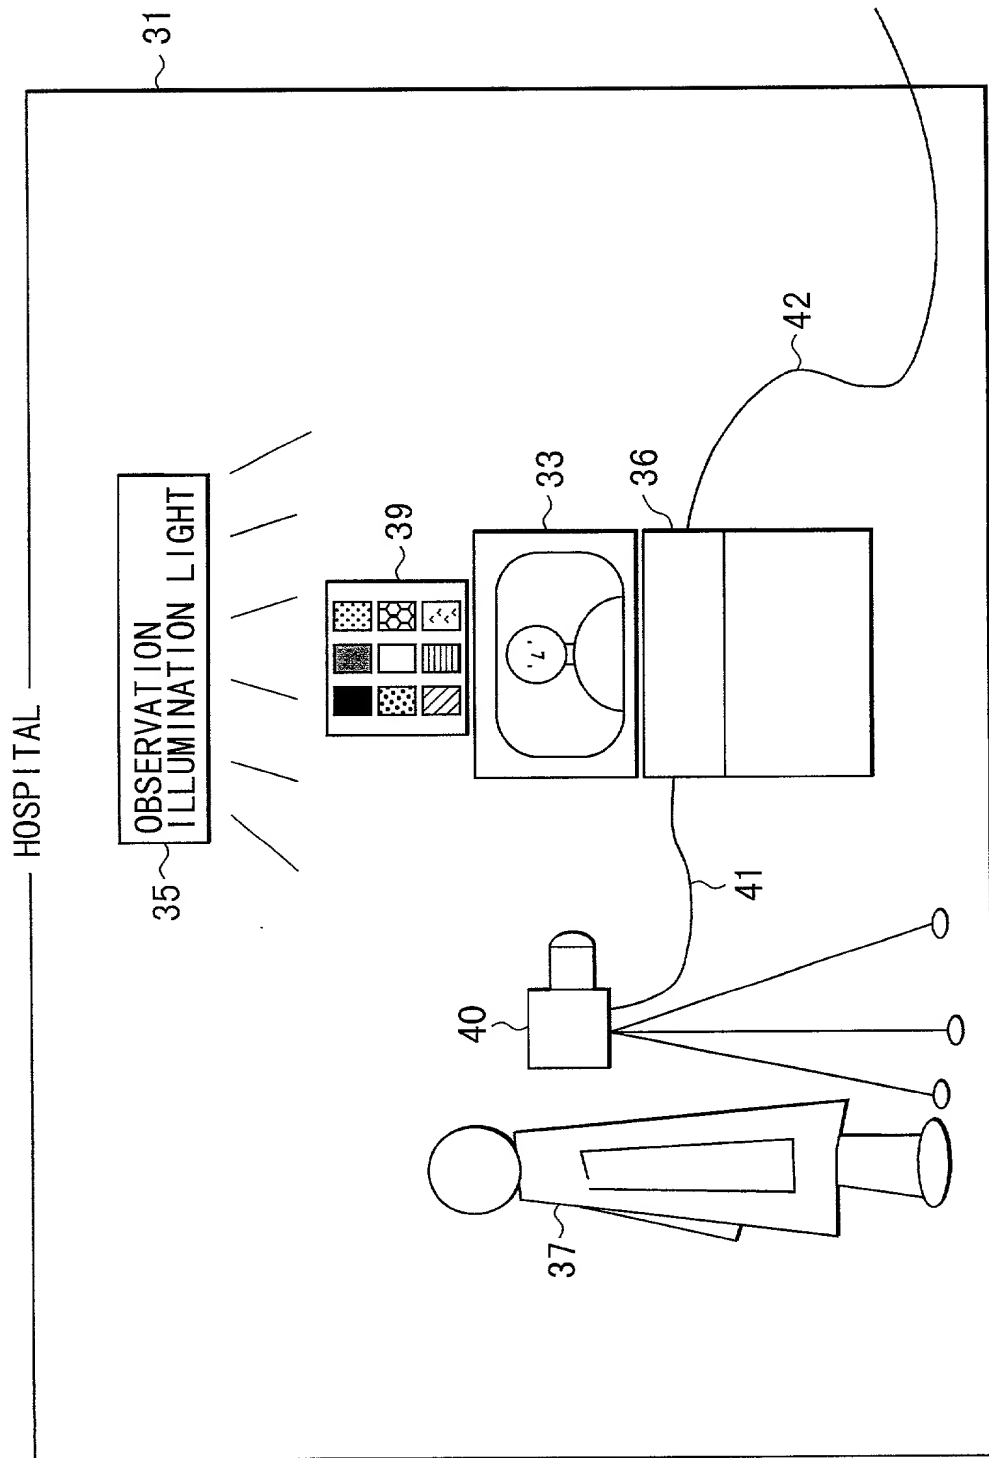


FIG. 9

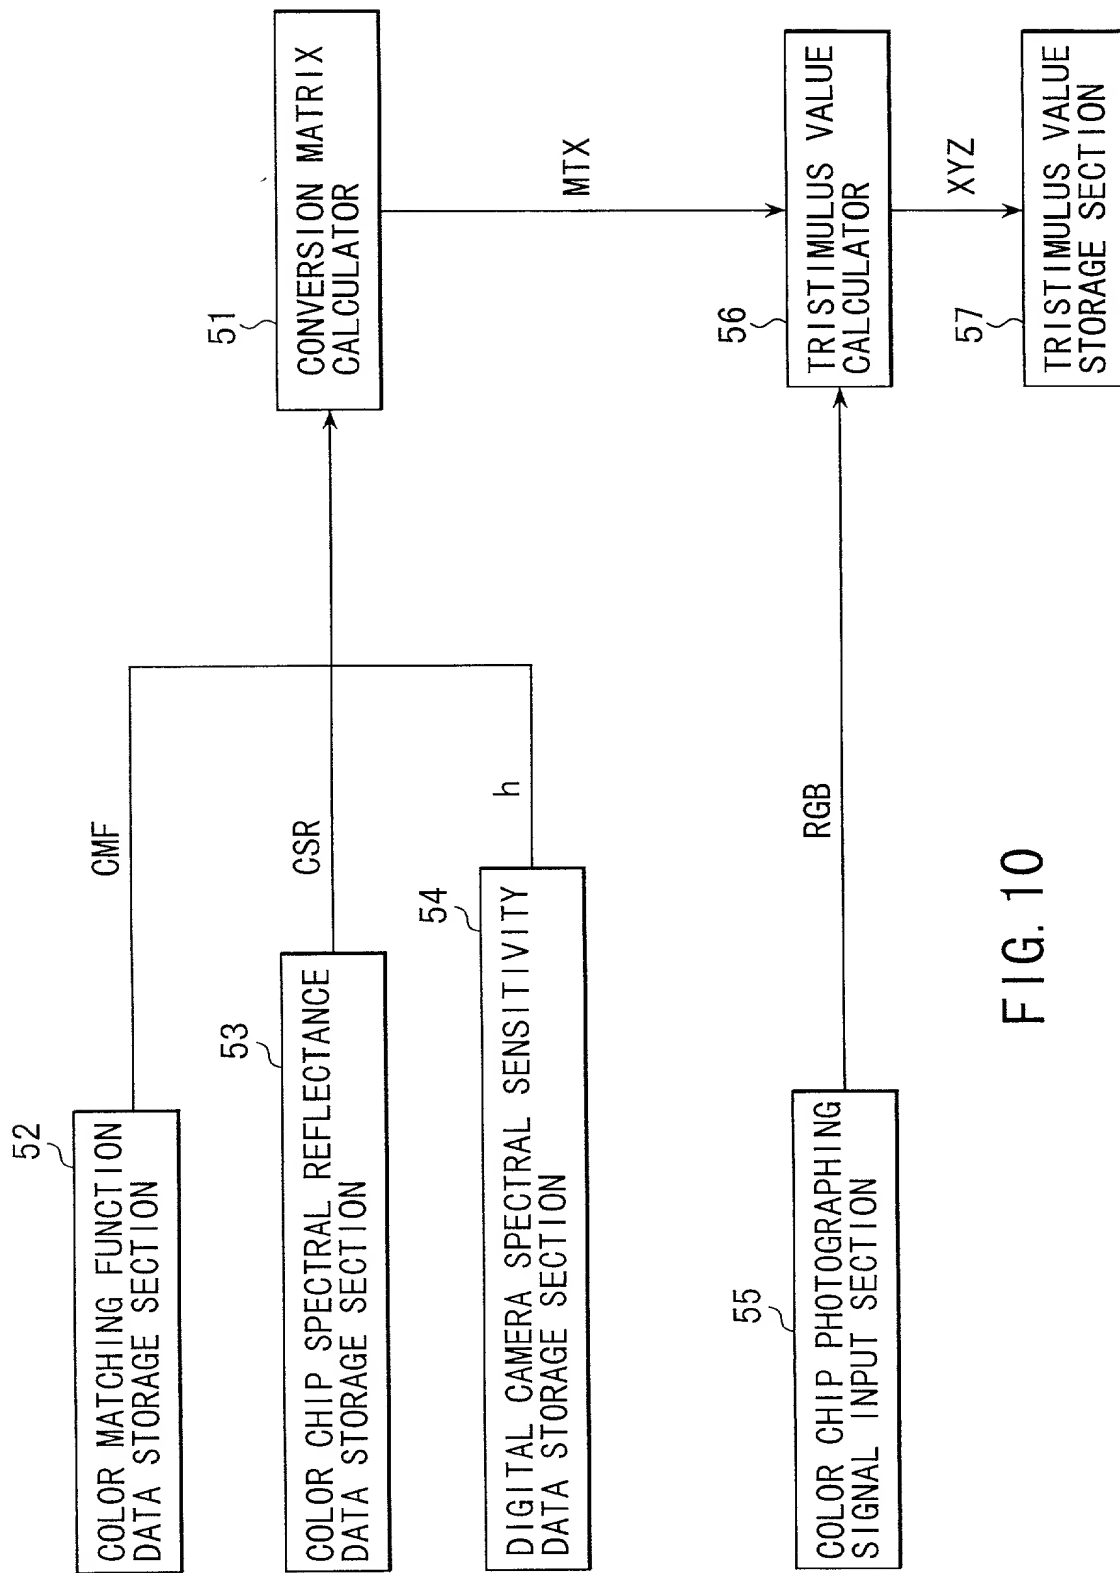


FIG. 10

Declaration Power of Attorney For Patent Application

特許出願宣言書及び委任状 Japanese Language Declaration 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の横に記載された通りです。

My residence, post office address and citizenship are as stated below next to my name,

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

色再現システム

COLOR REPRODUCTION SYSTEM

上記発明の明細書（下記の欄で×印がついていない場合は、本書に添付）は、

The specification of which is attached hereto unless the following box is checked:

☐ _____ 月 _____ 日に

提出され米国出願番号または特許協定条約

☐ was filed on _____
as United States Application Number or
PCT international Application Number

国際出願番号を _____ とし、

_____ and was amended on

（該当する場合） _____ 月 _____ 日に訂正されました。

_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56

Japanese Language Declaration

(日本語宣言書)

私は、合衆国法典第35編第119条(a)-(d)項又は第365条(b)に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)
外国での先行出願

Priority Not Claimed
優先権の主張なし

10-323137
(Number)
(番号)

JAPAN
(Country)
(国名)

13/11/1998
(Day/Month/Year Filed)
(出願年月日)

☐☐☐☐☐

私は、第35編米国法典119条(e)項に基いて下記の米国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below:

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基いて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) or 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT Information application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which become available between the filing date of the prior application and the national or PCT international filing date of application:

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書で私が行う表明が真実であり、かつ私の入手した情報と私の信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration

(日本語宣言書)

委任状：私は、下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。
(弁理士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Leonard Holtz (Reg.No. 22,974), Herbert H. Goodman (Reg.No. 17,081),
Thomas Langer (Reg.No. 27,264), Marshall J. Chick (Reg.No. 26,853),
Richard S. Barth (Reg.No. 28,180), Douglas Holtz (Reg.No. 33,902), and
Robert P. Michal (Reg.No. 35,614).

書類送付先:

Send Correspondence to
FRISHAUF, HOLTZ, GOODMAN,
LANGER & CHICK, P.C.

767 Third Avenue - 25th Floor,
New York, N.Y. 10017-2023

直通電話連絡先:

Direct Telephone Calls to: (name and telephone number)
Telephone No. (212) 319-4900
Facsimile No. (212) 644-4834

唯一のまたは第一発明者の氏名	Full name of sole or first inventor
大澤 健郎	Kenro Ohsawa
同発明者の署名 日付	Inventor's signature Date
	<i>Kenro Ohsawa</i> Nov. 5, 1999
住 所	Residence
日本国八王子市	Hachioji-shi, Japan
国 籍	Citizenship
日本	JAPAN
郵便の宛先 日本国東京都八王子市久保山町2-3	Post Office Address c/o Intellectual Property & Legal Department, OLYMPUS OPTICAL CO., LTD.
オリンパス光学工業株式会社 知的財産法務部内	2-3, Kuboyama-cho, Hachioji-shi, Tokyo, Japan

(第二以降の共同発明者に対しても同様に記載し、署名を
すること。)

(Supply similar information and signature for second
and subsequent joint inventors.)